



FilterSense

Particle Counter

With the FilterSense range of Particle Counters you get a low cost filter monitoring solution. The first particle counter to allow multiple sensors on a single analyzer. The FilterSense is a low cost solution to monitoring filters for Cryptosporidia and Giardia sized particles.

- Counts particle 2-750 microns
- Counts and sizes 2-127 microns
- Up to 3 user selectable size ranges (selectable at time of purchase)
- Sapphire optics for extended life
- User calibratable for a lower cost of ownership
- Designed to measure multiple points in a filter gallery



The FilterSense sensors are available with different controllers giving you the same great performance with different communication, display, and control options. Each sensor comes with a 'clean me' alert and can be run with a constant head weir or a flowmeter, to maintain a constant flow. FilterSense gives a low cost particle counter specifically designed to monitor multiple filters.

CRONOS® FilterSense



- High Quality - Lowest Cost
- Multilingual
- High resolution grayscale display
- 9 buttons for easy navigation
- Graphing and datalogging
- Enclosure; wall, panel, pipe or pole mounting. IP65/Nema 4x.
- Options:
 - Modbus RS485/LAN
 - Profibus DPV 1
 - Up to 2 sensors
 - PID/flow proportional controls
 - Remote sensors
 - Color display
 - Downloadable data logs

CRIUS® FilterSense



- Highest Quality - Low Cost
- Multilingual
- High resolution color display
- Intuitive user interface
- Downloadable data logs
- Customizable home pages
- All CRONOS® options plus:
 - Up to 4 sensors
 - Remote access via LAN
 - Remote access via 3G/4G
 - Expandable to 16 sensors

For more information please see the individual brochures for CRONOS® and CRIUS®

Particle Counter Sensors FilterSense



- Multiple filters
- Low cost per part
- Up to 3 size ranges
- Filter breakthrough alarms

CounterSense



- Up to 6 size ranges
- Multipoint
- Remote access optional
- PID controls

ParticleSense



- Up to 8 channels
- Stand alone
- Modbus RTU
- Modbus TCP optional

ParticleSense Portable



- Same specification as ParticleSense
- Portable
- Grab and online mode
- Ideal for troubleshooting
- Rugged case

Principle of Operation

As particles in a water stream pass through a measurement cell they break a laser beam. This break is measured by a detector opposite the laser beam and the number of breaks is equal to the number of particles and the size of signal (created as the particle passes through the beam) is proportional to the size of the particle. The FilterSense is unique in the marketplace in that it allows:

- Simple user calibration
- Set up direct from the instrument (no software/PC required)
- Multiple sensor capability
- Control with PID functions based on particle counts
- Multipoint monitoring

Applications

The most common application for a FilterSense is in water treatment and the optimization or ongoing monitoring of filters. The FilterSense, when coupled with turbidity and differential pressure sensors offers onboard PID control of automatic backwash. Using head loss or particle counts to control a filter backwash can extend filter run times significantly providing for greatly reduced electrical costs. FilterSense provide a low cost per point for filter breakthrough monitoring.

Specification*

Laser Type:	Solid-state laser diode (780nm)
Cell Material:	Nituff™ coated aluminum PEEK plastic (optional)
Viewing Windows:	Sapphire
Detection Range:	2-750 microns
Sizing Range:	2-127 microns
Flow Rate:	75ml/min
Resolution:	Better than 10% at 10 micron (ASTM-F658)
Coincidence Limit:	20,000 cnts/mL (2 micron)
Signal to Noise Ratio:	Better than 5:1
Size Channels:	Up to 3 user selectable and total counts
Alarms:	Sensor diagnostic, particle count limit, cell condition
Laser Diode Life:	MTBF 75,000 hours@55°C
Measurement Type:	Light obscuration, Volumetric
Comms:	TCP/IP, Modbus, RS232, RS485, 4-20mA, Profibus
Power supply:	100-250V AC, 50/60Hz 8-36V DC
Operating ambient temperature:	0-50°C
Sample Process temperature:	0-50°C
Cleaning:	<5 mins, 6 monthly on clean water
Enclosure rating:	IP65
Display:	Value and Alarms at the same time, controller dependent

Other applications for FilterSense include:


- Pre RO monitoring
- Make up water monitoring
- Ultraclean medical device washing monitoring
- Membrane filtration monitoring

Particle Counts vs. Turbidity

Most filters will have a turbidity meter on the outlet to monitor the efficiency of the filter. Whilst a turbidity meter is a valuable tool, it doesn't tell you the whole story regarding filter breakthrough. A turbidity meter will warn the plant operator if small particles are getting through the filter (<1µm) but won't be sensitive to larger particles breaking through the filter (>1 ntu), which are often the particles of most interest as they are a similar size to Giardia and Cryptosporidia oocysts, therefore both technologies are required to fully understand a filter.

For more information please visit:

www.processinstruments.net/products/particle-counter/

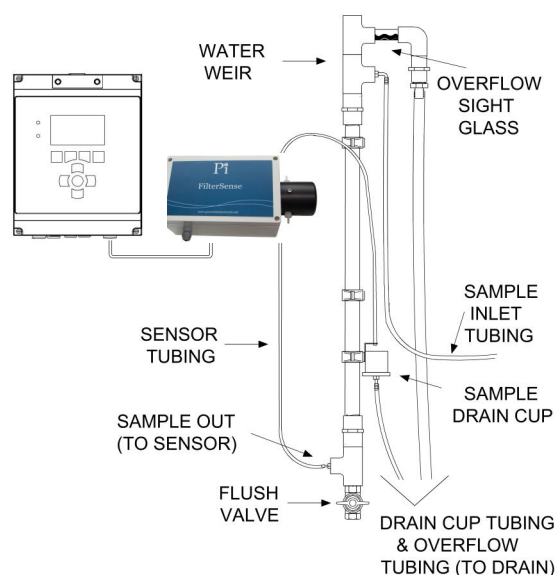

CRIUS® FilterSense with overflow weir

**All subject to change without notice*